





GYRO SENSOR (Digital Output)

XV7011BB

Product number
XV7011BB: X2A000271xxxx00

- SPI or I²C serial interface
 - Angular rate output (16/24bit)
 - Excellent bias stability over temperature
 - Operating temperature range -20 °C to +80 °C
(Option: -40 °C to +85 °C)
 - Built-in temperature sensor
 - Built-in selectable digital filter
 - Low power consumption
- Recommended Application**
- Anti vibration and attitude control for industrial applications etc.
 - Motion detection for man machine interface



*The I2C-Bus is a trademark of NXP Semiconductors


Specifications (characteristics)

Item	Symbol	Specifications	Conditions / Remarks
Supply Voltage	VDDM	2.7 to 3.6 V	
Supply Voltage for interface	VDDI	1.65 V to 3.60 V	
Temperature range	Storage Temperature	TSTG	-40 °C to +85 °C
	Operating Temperature	TOPR	-20 °C to +80 °C Option: -40 °C to +85 °C
Scale factor	So	280 LSB/(°/s) ±5 %	16bit, Ta=+25 °C
		71680 LSB/(°/s) ±5 %	24bit, Ta=+25 °C
Bias	ZRL	±1 °/s (0 LSB Typ.)	Ta=+25 °C
Bias over temperature	ZRL _t	±1 °/s	Variation from Ta = +25 °C
Rate range	I	±100 °/s	
Non linearity	NI	±0.5 %FS	Ta=+25 °C
Cross axes	CS	±5 %	Ta=+25 °C
Current consumption	Iop1	0.9 mA Typ.	Not communicating
Stand-by current	Iop2	160 µA Typ.	
Sleep current	Iop3	3 µA Typ.	
Noise	Nd	0.003 (°/s)/√Hz	at 10Hz

Product Name
(Standard form)XV7011BB * *
① ②③④ ⑤ ⑥①Model ②Detection axis (1:Z-axis) ③Package type(B: Ceramic 5032size)
④Output (B: SPI/I²C) ⑤Frequency ⑥Custom recognition(not necessary to specify)

External Dimensions

(Unit:mm)

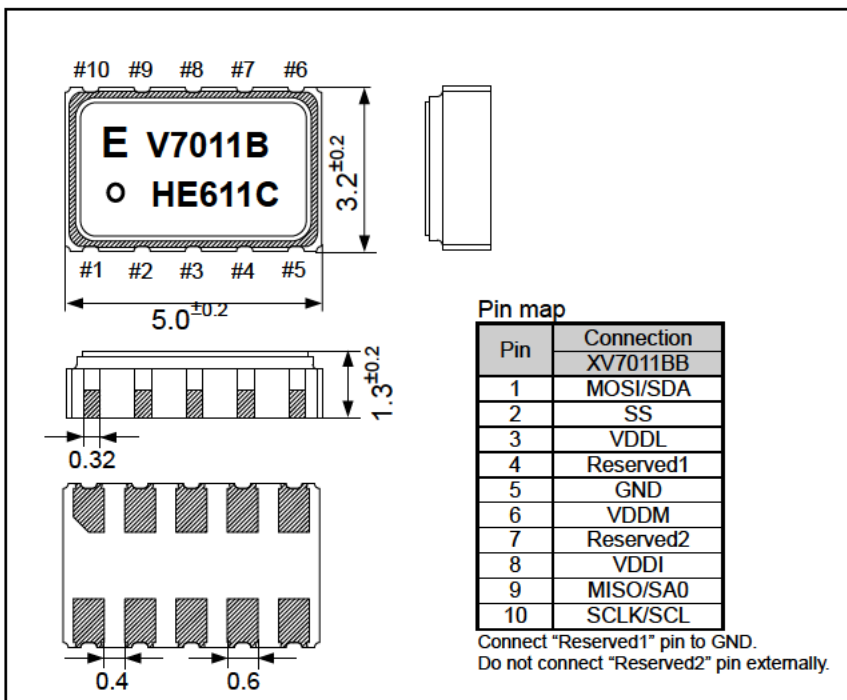

Footprint (Recommended)

(Unit:mm)

